


Quick Start Guide

(8200-1938-05_B0)

Flex Gen 2 Multi Sensor Dome Camera Mounting Accessories Quick Start Guide

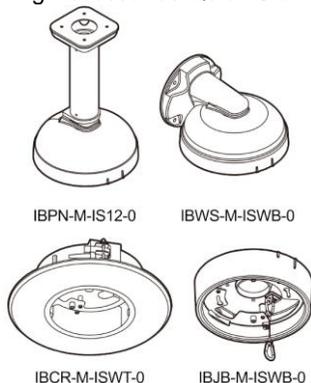

Mount Installation (IBPN-M-IS12-0)

1. Place the mounting template sticker on to the ceiling and drill four screw holes, cut out a cable hole and then insert the four screw anchors into the four screw holes.
2. Align the holes on the mounting plate with the holes on the mounting pole base (1) (Figure 1) and hold both up to the ceiling.
3. Align the four holes on the mounting pole base with the four holes on the ceiling.
4. Insert the four screws into the four holes on the mounting plate and securely attach the mount cover to the mounting pole.
5. Attach the safety lanyard to the 'hook' on the mount cover (2) (Figure 1) and the 'hook' on the camera base.
6. See the Flex Gen 2 Multi-sensor Dome camera QSG at <https://illustracameras.com/cameras/> for instructions to securely attach the camera to the ceiling mount.

In the box (IBWS-M-ISWB-0)

- 1 x Wall bracket mount
- 2 x Mounting screws (these attach the camera to the mount)
- 4 x Screws and screw anchors
- 1 x Safety lanyard (plus two spare lanyard ends)
- 1 x Quick Start Guide
- 1 x Mounting Template sticker
- 1 x Mounting plate

Installation tools (IBWS-M-ISWB-0)

- Drill
- Screwdriver

Mount Installation (IBWS-M-ISWB-0)

1. Place the mounting template sticker on to the mounting surface and drill four screw holes, cut out a cable hole and then insert the four screw anchors into the four screw holes.
2. Align the holes on the mounting plate with the holes on the wall mount base (1) (Figure 2) and hold the mounting plate and wall mount base up to the mounting surface.
3. Align the four holes on the mount base with the four holes on the surface.
4. Insert the four screws into the four holes on the mounting base and securely attach the base to the mounting surface.
5. Attach the safety lanyard (2) (Figure 2) to the 'hook' on the mount cover and the 'hook' on the camera base.
6. See the Flex Gen 2 Multi-sensor Dome camera QSG at <https://illustracameras.com/cameras/> for instructions to securely attach the camera to the wall mount.

Note: You must securely attach one of the camera mounts in the table below to the surface that you want to attach the camera. When the mount is installed then the camera is securely attached to the mount. See the Flex Gen 2 Multi-sensor Dome camera QSG at <https://illustracameras.com/cameras/> for instructions to securely attach the camera to the four mounts.

Mount Product Code	Description on label
IBPN-M-IS12-0	Flex Multi-sensor Ceiling bracket
IBWS-M-ISWB-0	Flex Multi-sensor Wall bracket
IBCR-M-ISWT-0	Flex Multi-sensor In-Ceiling bracket
IBJB-M-ISWB-0	Flex Multi-sensor Junction bracket

In the box (IBPN-M-IS12-0)

- 1 x Ceiling bracket mount
- 4 x Screws and screw anchors (attaching the pole to the ceiling)
- 2 x Mounting screws (attaching the camera to the mount cover)
- 1 x Safety lanyard (plus two spare lanyard ends)
- 1 x Quick Start Guide
- 1 x Mounting Template sticker
- 1 x Mounting plate (for attaching the pole to the ceiling)
- 1 x Allen wrench and 1 x Driver bit

Installation tools (IBPN-M-IS12-0)

- Drill
- Allen wrench
- Screwdriver

Mount Installation (IBPN-M-IS12-0) continued

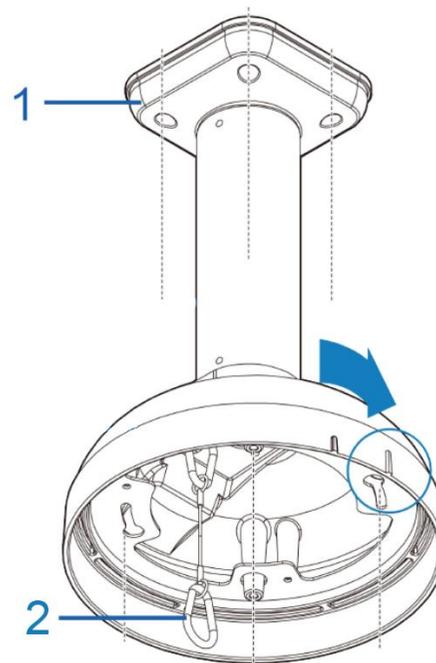


Figure 1

Mount Installation (IBWS-M-ISWB-0) continued

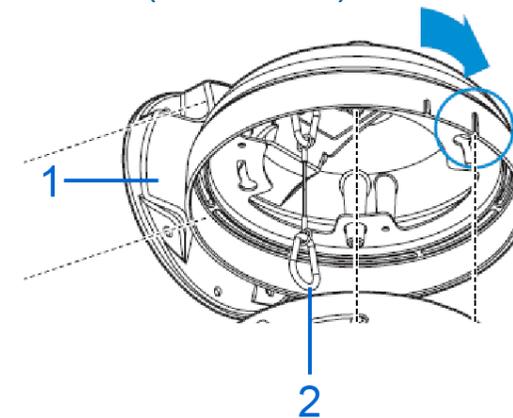


Figure 2

In the box (IBCR-M-ISWT-0)

- 1 x In-Ceiling bracket mount
- 1 x Eye bolt
- 1 x Quick Start Guide
- 1 x Mounting Template sticker
- 2 x Safety lanyard

Mount installation (IBCR-M-ISWT-0)

1. Place the mounting template sticker on to the ceiling and cut out a large hole as per the markings on the mounting template.
2. Attach one end of the safety lanyard to a secure structure or object in the ceiling and screw in the eye bolt (1) (Figure 3) to the top of the mount.
3. Attach the other end of the safety lanyard (2) (Figure 3) to the eye-bolt on the mount.
4. Pull the 'wings-tabs' (3) (Figure 3) out to tighten the mount against the ceiling.

Note: You can rotate the screw (4) (Figure 3) to adjust the 'wings-tabs' up or down.

Note: There are three 'wing-tabs' on the mount.

5. Attach the other safety lanyard to the 'hook' within the mount and the 'hook' on the camera base.
6. See the Flex Gen 2 Multi-sensor Dome camera QSG at <https://illustraceras.com/cameras/> for instructions to securely attach the camera to the wall mount.

In the box (IBJB-M-ISWB-0)

- 1 x Junction bracket mount
- 2 x Mounting screws (these attach the camera to the mount)
- 4 x Screws and screw anchors
- 1 x Safety lanyard
- 1 x Quick Start Guide
- 1 x Mounting Template sticker

Installation tools (IBJB-M-ISWB-0)

- Drill
- Screwdriver

Mount Installation (IBJB-M-ISWB-0)

1. Place the mounting template sticker on to the mounting surface and drill four screw holes, cut out a cable hole and then insert the four screw anchors into the four screw holes.
2. Align the four holes on the junction bracket mount with the four holes on the surface.
3. Insert the four screws into the four holes on the junction mount bracket and securely attach the mount to the mounting surface.
4. Attach the safety lanyard to the 'hook' on the mount cover (1) (Figure 1) and the 'hook' on the camera base.
5. See the Flex Gen 2 Multi-sensor Dome camera QSG at <https://illustraceras.com/cameras/> for instructions to securely attach the camera to the junction bracket.

Mount installation (IBCR-M-ISWT-0) continued

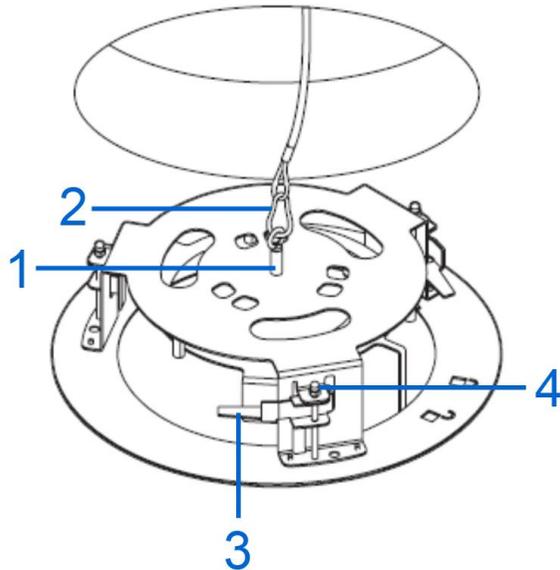


Figure 3

Mount Installation (IBJB-M-ISWB-0) continued

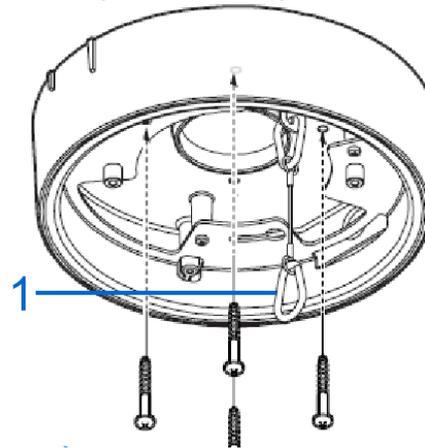


Figure 4