



# Kasa Smart Wi-Fi Light Switch, 3-Way



HS210



Two Location Control



Easy Installation



Remote Access



Schedule



Grouping

# Highlights

## The Smart 3-Way Switch Upgrade


The Kasa Smart Switch makes it easy to replace traditional 3-way switches commonly found in living rooms, hallways, or stairways where two switches control the same light. Turn your lights or fans on and off from anywhere, set schedules, and voice control with Alexa and Google Assistant.



**Notes:**  
Neutral wire required.  
The app screen depicted is for visual reference only and does not necessarily represent actual product operation or app appearance.

## Easy Install


No need to understand complex wiring, just follow the step-by-step wiring process in the Kasa Smart app for a guided installation. Your Kasa Smart Wi-Fi Light Switch, 3-Way comes with labels, a faceplate and the necessary hardware for your convenience.

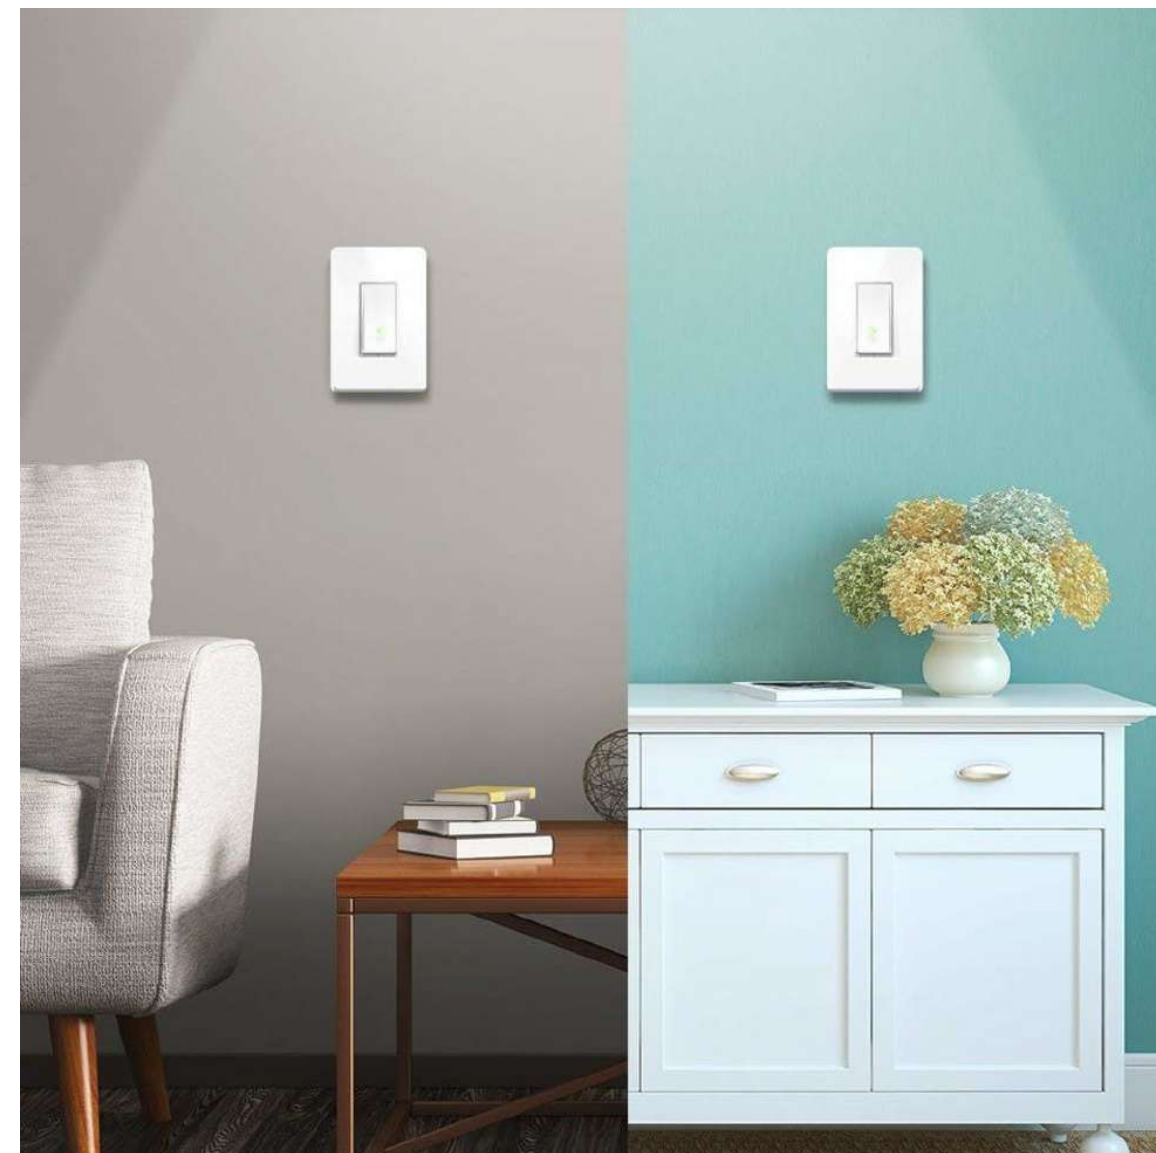

# Highlights


## Your Voice Has Power

Connect your Smart Switch to Amazon Alexa, Google Assistant, or SmartThings to enjoy a full hands-free experience.

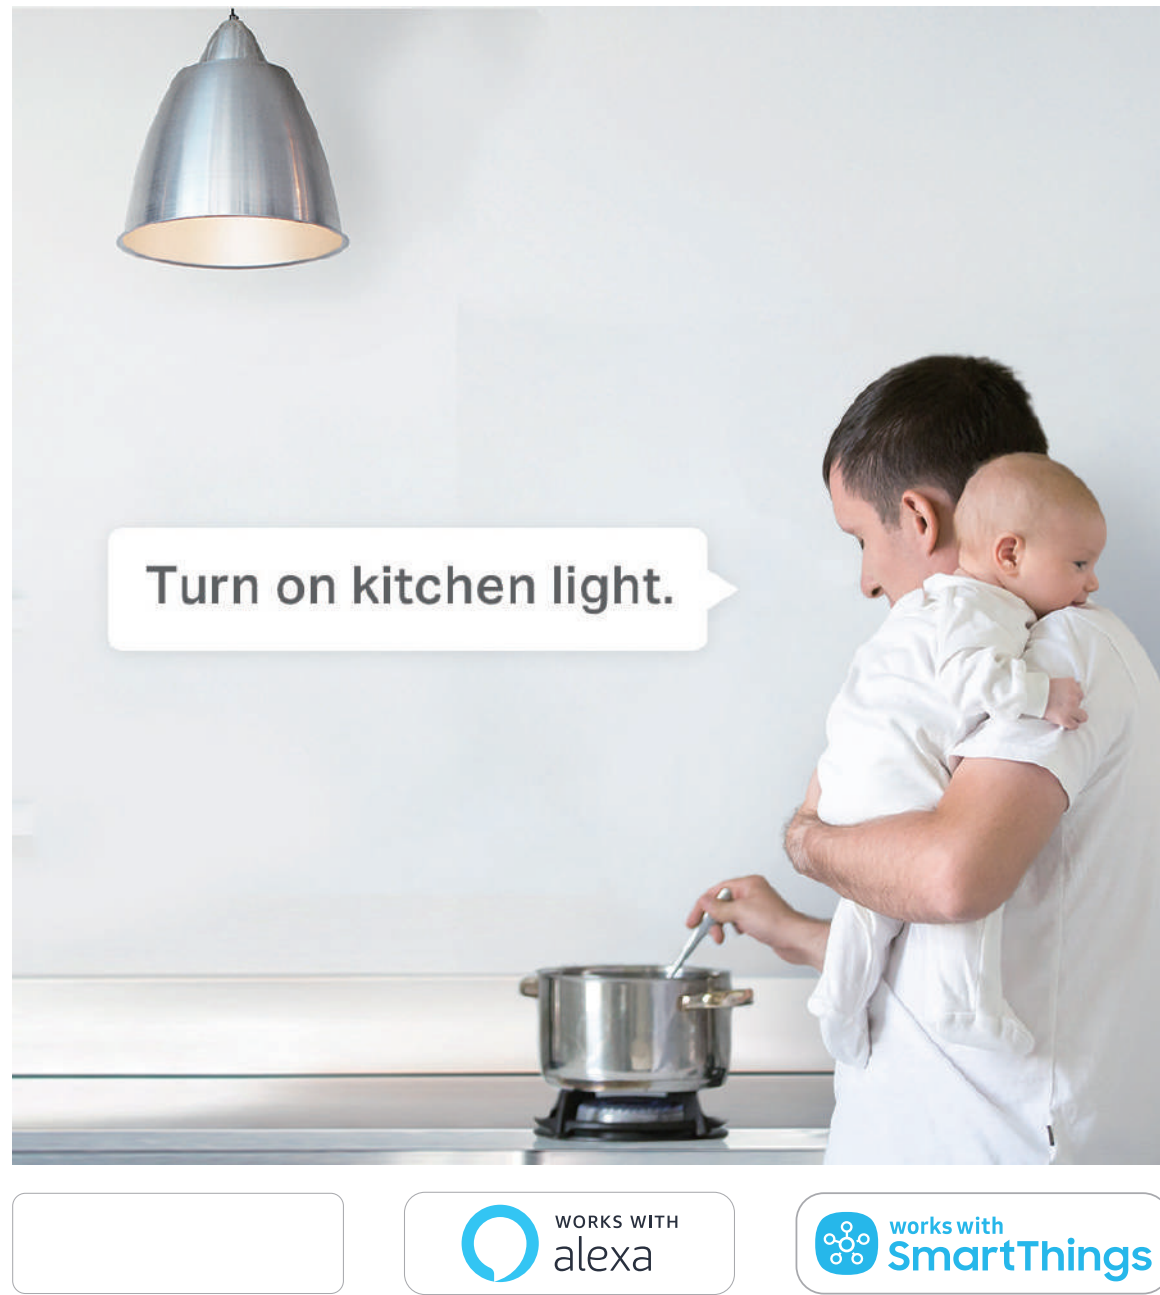

## Your Home. One App.

Turn your home into a true smart home with Kasa Smart. Automate your lights and appliances with smart plugs, bulbs, and switches. Secure your home with Kasa cameras. Control it all from the Kasa Smart app.

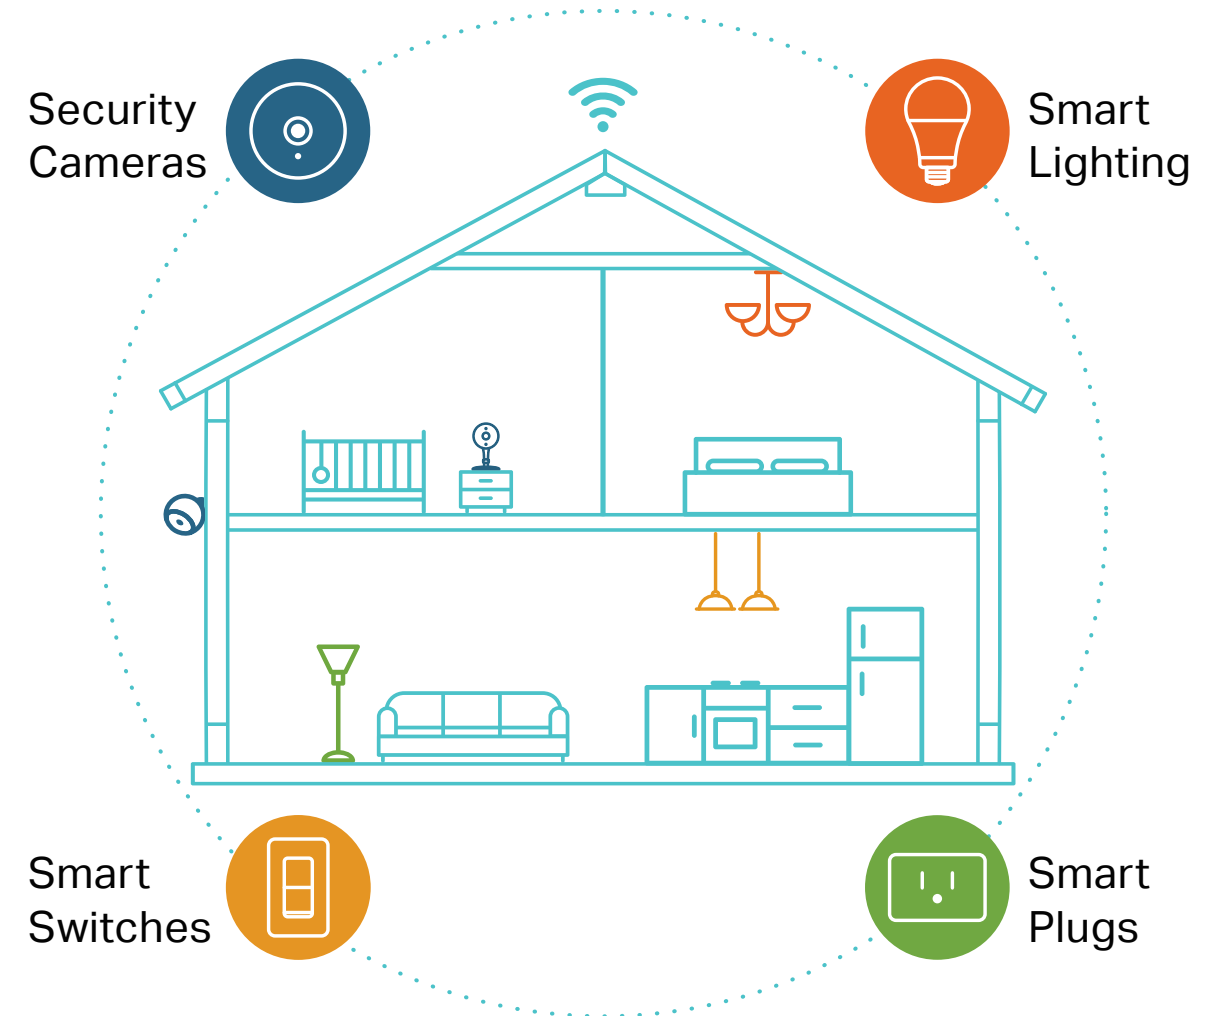

Learn more at [KasaSmart.com](https://KasaSmart.com)



# Features



## Easy to Install

- **Guided Installation** – Follow a simple step-by-step in-app guide for installation.
- **No Hub Required**– The Kasa Smart Wi-Fi Light Switch, 3-Way works with a secured 2.4GHz wireless network without the need for a separate hub.



## Ease to Use

- **Anywhere and Anytime** – Set schedules or turn on and off remotely.
- **Scheduling** – Program lights to turn off and on at set times.
- **Grouping** – Combine Kasa devices for unified control with one single tap.



## Plays well with Others

- **Works with Voice Assistants** – Use simple voice commands with Alexa, Google Assistant or SmartThings.
- **Compatible with Android, iOS** – The free Kasa Smart app lets you run Smart Switch from any Android (5.0 and higher) or iOS (iOS 10.0 and higher) devices.

# Specifications

## Working Status

- Rated: 120 VAC, 60 Hz
- Maximum Load: 15 A General Use, 600 W Incandescent

Note: If the Traveler wires between two 3-way switches are too long, the switches might not work properly. The specific length is based on the connected devices.

In general, the longest distance between one HS210 and a traditional switch is about 50~100 feet. If two HS210 are paired, the longest distance is about 100~300 feet.

## Network

- Requirements:
  - Secured 2.4 GHz Home Wi-Fi network
  - 3-Way switch wiring (single pole, double throw)
  - Neutral wiring in wall box
  - Standard lighting wall box (at least 2 inches deep)
- Protocol: IEEE 802.11b/g/n
- Wireless Type: 2.4 GHz

## General

- Package Contents:
  - For HS210:
    - 1× HS210, 3-Way Smart Switch
    - 1× wall plate
    - 2× wire nuts
    - 5× Wire Labels
    - 1× Quick Start Guide
  - For HS210 KIT:
    - 2× HS210, 3-Way Smart Switches
    - 2× wall plates
    - 4× wire nuts
    - 10× Wire Labels
    - 1× Quick Start Guide
- Certifications: FCC, IC, UL, RoHS
- Buttons: Restart, Reset
- Operating Temperature: 0 °C ~ 40 °C (32°F ~ 104°F )
- Operating Humidity: 10%~90%RH, Non-condensing

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders.  
©2022 TP-Link

[www.tp-link.com](http://www.tp-link.com)