

FEATURES

- Person, Loitering & Package Detection
- Two-Way Talk, Event-Activated Nightlight
- Full Head to Toe View (9:16) with Unique Leaning Design
- Flexible Storage Options, Recording on NVR or Micro SD Card (Up to 512GB)
- With Chime Kit and Wireless Chime
- Supports Standard POE Power Supply

SPECIFICATIONS

Camera:

Image Sensor	1/2.7" Progressive CMOS
Image Size	1944 x 2592
Shutter	1/5 ~ 1/2000000s
Iris Type	Fixed Iris
Min. Illumination	0 Lux (White LED On)
Lens	2.1mm @ F2.0
Lens Type	M8
Angular Field of View	Horizontal:96°, Vertical:132°, Diagonal:162°
WDR	Yes
BLC	Yes
HLC	Yes

Image:

Video Compression	H.265+/H.265/H.264+/H.264/MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/ High Profile
Bitrate Type	CBR / VBR
Bitrate	256Kbps~6Mbps
Resolution	1944x2592, 1800x2400, 960x1280
Main Stream	50/60Hz: 20FPS @ 1944x2492, 1800x2400
Sub Stream	50/60Hz: 20FPS @ 960x1280
Image Setting	Saturation, Hue, Brightness, Contrast, Sharpness, 3D NR
Audio Compression	G711A/U

Interface

Network	100M RJ45
Audio	Built-in Mic and Speaker
Reset Button	Yes
Storage	1-Channel Built-in Micro SD Card Slot Up to 512GB



Wi-Fi	Supports 2.4G/5G Wi-Fi
Doorbell Button Indicator	Yes

Function:

Remote Monitoring Online	Web Client / CMS Remote Control / Mobile App Supports Simultaneous Monitoring For Up To 5 Users Supports Multi-Stream Real-Time Transmission
Network	UDP, IPv4, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, UPnP, HTTPS, HTTP
Interface Protocol	ONVIF
Storage	Micro SD Card Storage
Intelligence	Human Detection, Package Detection
Analytics	Loitering Detection
General Function	Video Mask, Motion
White Light Distance	3.28Ft
IR Distance	9.84Ft
Weather Rating	IP65

SPECIFICATIONS

Miscellaneous:


Power	AC/DC 8-24 V
POE Power Supply	Yes
Power Consumption	TBD
Working Temperature	68F°~156°F
Humidity	Less Than 95%
Installation	Wall Mount (Mounting Bracket, Angled Bracket)

WIRELESS CHIME

Specifications:

Input	AC 100~240V; 50~60Hz
Transmission Mode	RF 433Mhz
Button	Setting Up / Selecting Ringtones / Adjusting Volume
Dimensions	106.5 x 53.5 x 38.7mm (4.19" x 2.10" x 1.52")


DIMENSIONS

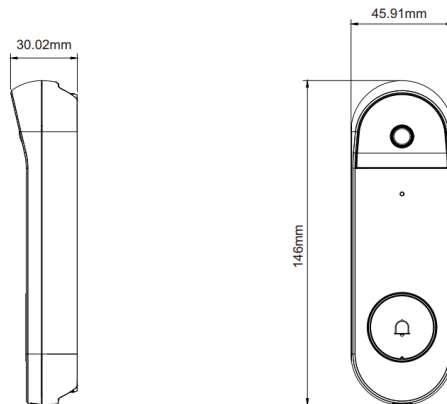

ACCESSORIES



BN-VDB/CM



Chime Kit



Mounting Bracket



Vertical Wedge



Horizontal Wedge