

4MP Network Security System

12 x 4 MP Eyeball Network Cameras with One (1) 16-channel 4K NVR



4 MP Network Cameras

- 4 MP at 20 fps Maximum Resolution
- 2.8 mm Fixed Lens
- Maximum IR Length 30 m (98 ft) with Smart IR
- Intelligent Video System
- IP67 Environmental Protection

4K Network Video Recorder

- Embedded Quad-core Processor
- Smart H.265+ and Smart H.264+ Dual Codec
- Up to 4 Channels of 8 MP or 16 Channels of 1080p Decoding
- 320 Mbps Incoming Bandwidth

System Overview

The Dahua Network Security System provides all the components to quickly install, configure, and employ a complete video surveillance solution. The IP cameras offer the clarity of 4 MP video, and the NVR offers built-in motion detection algorithms, alarm triggers, and customized recording modes. The NVR also features Plug and Play technology to connect quickly to cameras on the same network. Each component accepts a PoE power supply to facilitate installation.

Functions

Intelligent Video System

IVS is a built-in video analytic algorithm that delivers intelligent functions to monitor a scene for Tripwire violations, intrusion detection, and abandoned or missing objects. A camera with IVS quickly and accurately responds to monitoring events in a specific area. In addition to scene analytics, the camera detects and captures a snapshot of human face in a defined area within a scene, and offers tamper detection by recognizing a dramatic scene change and generating a warning message to inspect the camera.

Working with IVS-enabled IP cameras, the NVR recognizes and records video that contains IVS data on all IP channels. The NVR records standard intelligence at-the-edge features, as well as premium IVS features that detect abandoned or missing objects, Tripwire violations, and intrusion violations.

Smart IR

With IR illumination, detailed images can be captured in low light or total darkness. The camera's Smart IR technology adjusts the intensity of camera's infrared LEDs to compensate the distance of an object. Smart IR technology prevents IR LEDs from whitening out images as they come closer to the camera. The camera's integrated infrared illumination provides high performance in extreme low-light environments up to 30 m (98 ft).

Flexible Recording

The NVR offers a variety of configurable recording options and schedules that saves HDD space and active monitoring time. The NVR monitors incoming video and can be programmed to record if motion is detected or if an alarm is triggered. The NVR can also be programmed to record on a schedule or at different intervals. The recording options and schedules can be set for each individual camera or copied to all cameras.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

Environmental

With a built-in heater and a temperature range of -30°C to $+60^{\circ}\text{C}$ (-22°F to $+140^{\circ}\text{F}$), the cameras are designed for extreme temperature environments. The cameras, subjected to rigorous dust and water immersion tests, are certified to the IP67 rating making them suitable for demanding outdoor applications.

The NVR features an operating temperature of -10°C to $+55^{\circ}\text{C}$ ($+14^{\circ}\text{F}$ to $+131^{\circ}\text{F}$).

Interoperability

The camera and NVR conform to the ONVIF (Open Network Video Interface Forum) specification, ensuring interoperability between network video products regardless of manufacturer.

Technical Specification			
N41BK22 4 MP Network Camera			
Camera			
Image Sensor	1/3-in. CMOS		
Effective Pixels	2688 (H) x 1520 (V), 4 MP		
Scanning System	Progressive		
Electronic Shutter Speed	Auto, Manual: 1/30 s to 1/100000 s		
Minimum Illumination	Color: 0.08 lux at F2.0 (1/3 s, 30 IRE) Color: 0.3 lux at F2.0 (1/30 s, 30 IRE) 0 Lux with IR on		
S/N Ratio	More than 65 dB		
IR Distance	Up to 30 m (98.04 ft)		
IR On/Off Control	Auto, Manual		
IR LEDs	12		
Lens			
Lens Type	Fixed Lens		
Mount Type	Board-in		
Focal Length	2.8 mm		
Max Aperture	F2.0		
Angle of View	Horizontal: 104° Vertical: 57°		
Focus Control	Fixed		
DORI ¹ Distance			
Detect (8 ppf)	Observe (19 ppf)	Recognize (38 ppf)	Identify (76 ppf)
63 m (207 ft)	25 m (82 ft)	13 m (43 ft)	6 m (20 ft)
Installation Angle			
Range	Pan: 0° to 360° Tilt: 0° to 90° Rotation: 0° to 360°		
Video			
Compression	Smart H.265+, H.265, Smart H.264+, H.264, MJPEG (sub stream only)		
Streaming Capability	Two (2) Streams		
Resolution	4 MP (2688 x 1520), 3 MP (2304 x 1296), 1080p (1920 x 1080), 720p (1280 x 720), VGA (640 x 480), D1 (704 x 480), CIF (352 x 240)		
Frame Rate	Main Stream	4 MP at 20 fps or 3 MP at 30 fps	
	Sub Stream	D1 at 30 fps	
Bit Rate Control	CBR, VBR		
Day/Night	Auto (ICR), Color, B/W		
BLC Mode	BLC, HLC, True WDR (120 dB)		
Gain Control	Auto, Manual		
Noise Reduction	3D DNR		

1. The DORI distance is a measure of the general proximity for a specific classification to help pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specifications and lab test results according to EN 62676-4 , the standard that defines the criteria for the Detect, Observe, Recognize and Identify classifications.

Motion Detection	Off, On (4 Zones, rectangular)
Region of Interest	Off, On (4 Zones)
Smart IR	Auto, Manual
Digital Zoom	16x
Flip	0°, 90°, 180°, 270°
Mirror	Off, On
Privacy Masking	Off, On (4 Areas, rectangular)
Network	
Ethernet	RJ-45 (10/100 Base-T)
Protocol	HTTP, HTTPs, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPOE, IPv4/v6, QoS, UPnP, NTP, Bonjour, 802.1x, Multicast, ICMP, IGMP, SNMP
Interoperability	ONVIF Profile S & G, API
Streaming Method	Unicast, Multicast
Max. User Access	10 Users /20 Users
Edge Storage	NAS Local PC for instant recording
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	Smart PSS, DSS
Mobile Operating System	IOS, Android
Certifications	
Safety	UL60950-1
Electromagnetic Compatibility (EMC)	FCC CFR 47 FCC Part 15 Subpart B
Electrical	
Power Supply	12 VDC, 0.5 A or PoE (IEEE 802.3af, Class 0)
Power Consumption	< 5.5 W
Environmental	
Operating Conditions	−30° C to +60° C (−22° F to +140° F), Less than 95% RH
Storage Conditions	−30° C to +60° C (−22° F to +140° F), Less than 95% RH
Ingress Protection	IP67
Construction	
Casing	Aluminium
Dimensions	ø93.40 mm × 79.40 mm (ø3.68 in. x 3.13 in.)
Net Weight	0.30 kg (0.66 lb)
Gross Weight	0.42 kg (0.93 lb)
Intelligence	
IVS triggers an alarm and takes a defined action for the following events:	
Standard Features	- Tampering with the camera. - Error writing to an onboard Micro SD card. - Error sending or receiving data over the network. - Unauthorized access to the camera.
Premium Features	
Motion	An object moves through any part of the scene.
Tripwire	A target crosses a user-defined line.
Intrusion	A target enters or exits a defined perimeter.

Technical Specification		
N52B3P4 4K NVR		
System		
Main Processor		Quad-core Embedded Processor
Operating System		Embedded LINUX
Audio and Video		
IP Camera Input		16 Channels
Audio	Input	One (1) Channel, RCA
	Output	One (1) Channel, RCA
Recording		
Compression		Smart H.265+, H.265, Smart H.264+, H.264, MJPEG
Supported IP Camera Resolution		12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 1.3 MP, 720p, 960H, D1, CIF
Maximum Incoming Bandwidth		320 Mbps
Bit Rate		16 Kbps to 20 Mbps per Channel
Record Mode		Manual, Schedule (Regular, Motion Detection, Alarm, IVS), Stop
Record Interval		1 to 120 minutes (default: 60 minutes), Pre-record: 1 s to 30 s, Post-record: 10 s to 300 s
Display		
Interface		One (1) HDMI One (1) VGA
Native Output Resolution	HDMI	3840 x 2160, 2560 x 1440, 1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768
	VGA	1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768
Maximum Decoding		• Four (4) Channels of 8 MP at 30 fps • Eight (8) Channels of 4 MP at 20 fps • 16 Channels of 1080p at 30 fps
Multi-screen Display		1/4/8/9/16
On-screen Display		Camera Title, Time, Camera Lock, Motion Detection, Recording
Network		
Interface		One (1) RJ45 (10/100/1000 Mbps) Port
PoE		16 Ports (IEEE 802.3af/at) Ports 1 through 8 support ePoE and EoC
Network Function		HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, SNMP, IP Search (Support Dahua IP camera, DVR, NVS)
Maximum User Access		128 Users
Mobile Operating System		IOS, Android
Interoperability		ONVIF 2.4, SDK, CGI

Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, and Tampering
Alarm Input	Four (4) Channels
Relay Output	Two (2) Channels

Playback and Backup

Playback	1/4/9/16
Search Mode	Time/Date, Alarm, MD and Exact Search (accurate to 1 second)
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, and Digital Zoom
Backup Mode	USB Device/Network

Storage

Internal HDD	Two (2) SATA III Ports, up to 10 TB per port Unit ships with a pre-installed 4 TB HDD
--------------	--

Auxiliary Interface

USB	One (1) USB 2.0 Ports (front panel) One (1) USB 3.0 Ports (rear panel)
RS232	One (1) Port, for PC and Keyboard Communication
RS485	One (1) Port, for PTZ Control

Electrical

Power Supply	Single, 100 VAC to 240 VAC, 50/60 Hz
Power Consumption, NVR	< 15.2 W, without HDD
Total PoE Power	130 W total rated power, 80% control for protection
Smart Fan	Automatically adjusts running speed

Construction

Dimensions	
NVR	375.0 mm x 326.50 mm x 53.0 mm (14.80 in. x 12.90 in. x 2.10 in.)
with PFH101 Rack Mount Tray	482.60 mm x 287.0 mm x 56.0 mm (19.0 in. x 11.30 in. x 2.20 in.)
Net Weight	2.70 kg (6.0 lb), without HDD
Gross Weight	4.0 kg (8.80 lb), without HDD

Environmental

Operating Conditions	−10° C to +55° C (+14° F to +131° F), 86 kpa to 106 kpa
Storage Conditions	−20° C to +70° C (−4° F to +158° F), 0% to 90% RH

Certifications

Safety	UL 60950-1, EN 60950-1
Electromagnetic Compatibility (EMC)	FCC Part 15 Subpart B, ANSI C63.4-2014 EN 55032, EN 50130-4
Immunity	EN 55024

Ordering Information

Type	Part Number	Description
4 MP Network Security System	N5164E124	
	• N41BK22	4 MP IR Eyeball Network Cameras (x12)
	• N52B3P4	16-channel 4K NVR, 4 TB (x1)
4 MP Camera Accessories, optional	PFA13A-E	Junction Box (For use alone)
	PFA152-E	Pole Mount (For use with PFB204W wall mount)
	PFB204W	Wall Mount (For use alone or with PFA152 pole mount)
	DH-PFM321D-US	12 V, 1 A Power Adapter

Package Contents (individual devices ship with the following:)

Product	Material
Network Cameras	Printed Manual Printed Regulatory Guide Plastic Wall Anchors with Screws (x3) Wrench Mounting Template Product Documentation CD Waterproof Ethernet Connector
Storage Device	Quick Network Guide Printed Manual Printed Regulatory Guide Mouse Product Documentation CD Power Adapter with Power Cord Ethernet Cable, RJ45 Rubber Feet (x4)

Camera Accessories

Optional:



PFA13A-E
Junction Box



PFB204W
Wall Mount




PFA152-E
Pole Mount





DH-PFM321D-US
Power Adapter

Junction Mount	Pole Mount
PFA13A-E	PFB204W + PFA152-E
Wall Mount	
PFB204W	


Dimensions (mm/in.) - 4 MP Network Camera

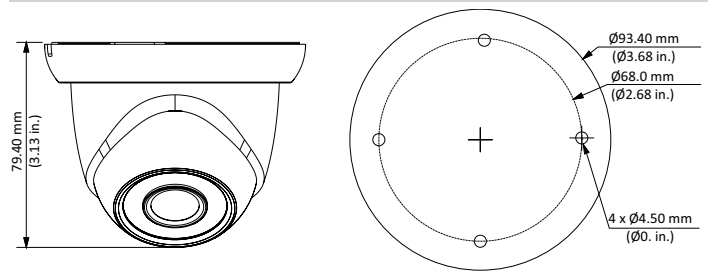

Dimensions (mm/in.) - 4K NVR

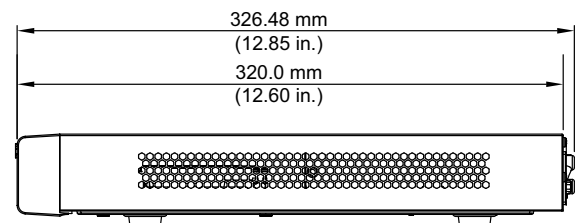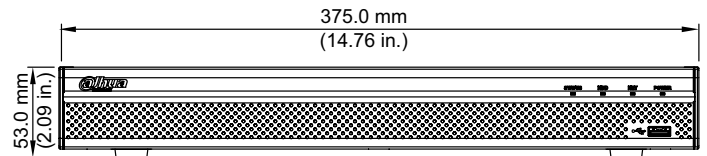

Rear Panel - 4K NVR

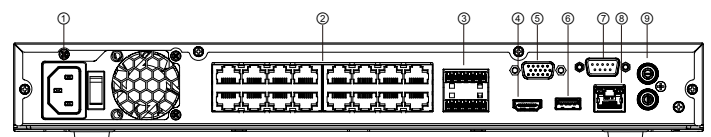

1	Power Input	6	USB Port
2	PoE Output x 16	7	RS232 Port
3	Alarm I/O	8	Network Port
4	HDMI Output	9	Audio Input/Output
5	VGA Output		