

1/4" Concealed-Mount Contacts

SM-206Q/W

1" (25mm) Gap, Closed Loop, Wire Leads, White

SM-206Q/BR

1" (25mm) Gap, Closed Loop, Wire Leads, Brown



SM-206Q/BR shown



Features


- Used for protecting sliding doors and windows where space is limited
- 1/4" (6mm) Recessed mount
- 15" (38cm) Wire leads
- Contact reed switch is SPST, deactivated rhodium on gold underplating for a longer expected life
- Unique glue/epoxy compound protects reed switch
- For closed loop circuits
- 1" (25mm) Gap
- Lifetime limited warranty



Specifications

Model		SM-206Q/W	SM-206Q/BR
Loop type		Closed loop	
Electrical configuration		N.O. (SPST)	
Operation gap		1" (25mm)	
Connectors		15" (38cm) Leads	
Color		White	Brown
Material	Case	High-impact ABS plastic / epoxy compound	
	Contact	Deactivated rhodium on gold underplating	
Contact rating		1.0A@10VDC (max.)	
		10W (max.)	
Operating temperature		-15°~160° F (-25°~70° C)	
Switch cycles		50 Million (0.1mA@5VDC)	
Dimensions	Switch	1 1/4"xø1/4" (32xø6 mm)	
	Magnet	1 1/4"xø1/4" (32xø6 mm)	
Magnet		Alnico 5	

Dimensions

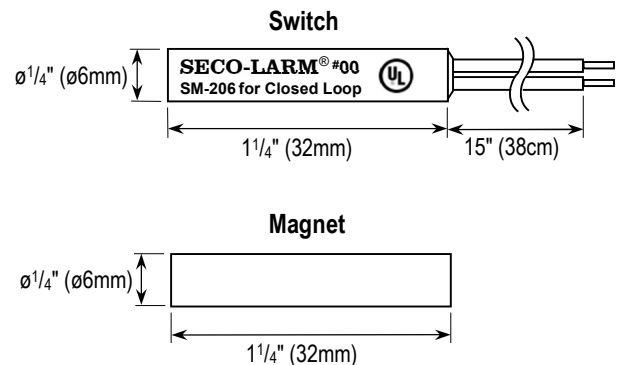

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_SM-206Q_210426.docx

1/4" Oculta Montaje Contactos Magneticos

SM-206Q/W 1" (25mm) Brecha, Lazo cerrado,
Cables Conductores, Blanco



SM-206Q/BR 1" (25mm) Brecha, Lazo cerrado,
Cables Conductores, Café

Características

- Se utiliza para proteger puertas corredizas y ventanas donde el espacio es limitado
- 1/4" (6mm) Montaje a presión
- 15" (38cm) cables conductores
- El interruptor de lengüeta de contacto es SPST, rodio desactivado en chapado de oro para una vida útil más larga
- El compuesto único de pegamento/epoxi protege el interruptor de lamina
- Para circuitos cerrados
- 1" (25mm) Brecha
- Garantía limitada de por vida




SM-206Q/BR mostrado



Especificaciones

Modelo	SM-206Q/W	SM-206Q/BR
Tipo de circuito	Lazo cerrado	
Configuración eléctrica	N.A. (SPST)	
Brecha de operación	1" (25mm)	
Conectores	15" (38cm) Cables conductores	
Color	Blanco	Café
Material	Caja	Plástico ABS de alto impacto / compuesto epoxi
	Contactos	Rodio desactivado en chapado de oro
Puntuación de contactos	1.0A@10VDC (max.)	
	10W (max.)	
Temperatura	-15°~160° F (-25°~70° C)	
Ciclos de conmutación	50 Million (0.1mA@5VDC)	
Dimensiones	Interruptor	1 1/4"xø1/4" (32xø6 mm)
	Imán	1 1/4"xø1/4" (32xø6 mm)
Tipo de imán	Alnico 5	

Dimensiones

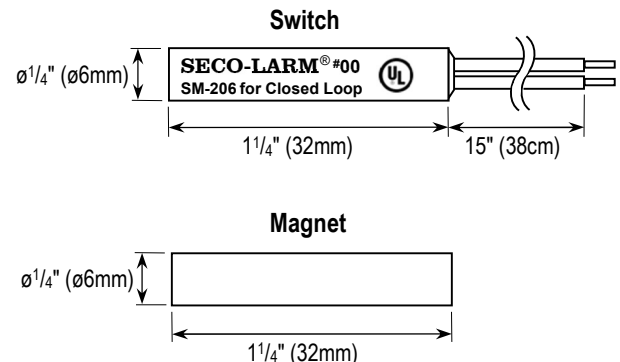

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Webseite: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2021 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SM-206Q_210426.docx