


R71CF-312

**Access Control with Card + Face
Recognition Face Recognition Reader and
Controller with Bundled 1500 Face Database**

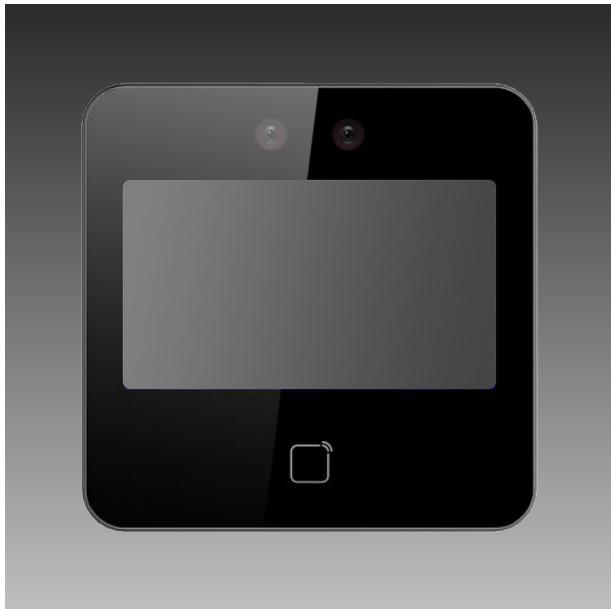

- Access Control with Card + Face Recognition
- Access Control with Card + Face Recognition
- 4.3" LCD Color Touch Screen
- Bundle with 1500 Face Database
- Built-in Mifare Card Reading Module
- QR Code Support
- Bundled power adapter (DC 12V)
- Not available in the USA

► Specifications

Product Profile

Product Type	Reader and Controller
Device Type	Access Controller RFID Reader Face Reader QR Code Reader
Product Application	Access Control with Card + Face Recognition
Application Environment	Indoor
Maximum Resolution	2MP
LCD Screen	4.3" Color Touch Screen

Lens

Number of Lenses	2 Lenses
------------------	----------

Video

Built-in Analytics	Face Recognition, RFID Recognition
--------------------	------------------------------------

Network

Ethernet Port	1 x Ethernet (10/100 Base-T), RJ-45 connector
---------------	---

Video Analytics

Face Recognition Distance	0.3m - 1.5m
---------------------------	-------------

System

Operating System	Linux
------------------	-------

Access Control Functionality

Access Mode	Card only, QR Code, Face only, Card and Face
Wiegand Format	Wiegand 26, Wiegand 34

RFID Card

RFID Frequency	13.56 MHz
RFID Options	Mifare

Storage

User Database	Card Capacity: 3000 Face Picture Capacity: 1500
Face Only Detection User Limit	1500


Interface

Serial Port	1 x RS-485
Digital Input	Exit Button x 1, Door contact x 1
Relay Output	Door lock x 1
Wiegand Port	Wiegand Output x 1

General

Power Source	DC 12V, 1 A
Bundled Accessories	Power Adapter (DC 12V)
Operating Temperature	-10°C ~ 40°C (14°F ~ 104°F)
Operating Humidity	0% - 90% RH, non-condensing
Warranty	1 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

► Dimension Diagram

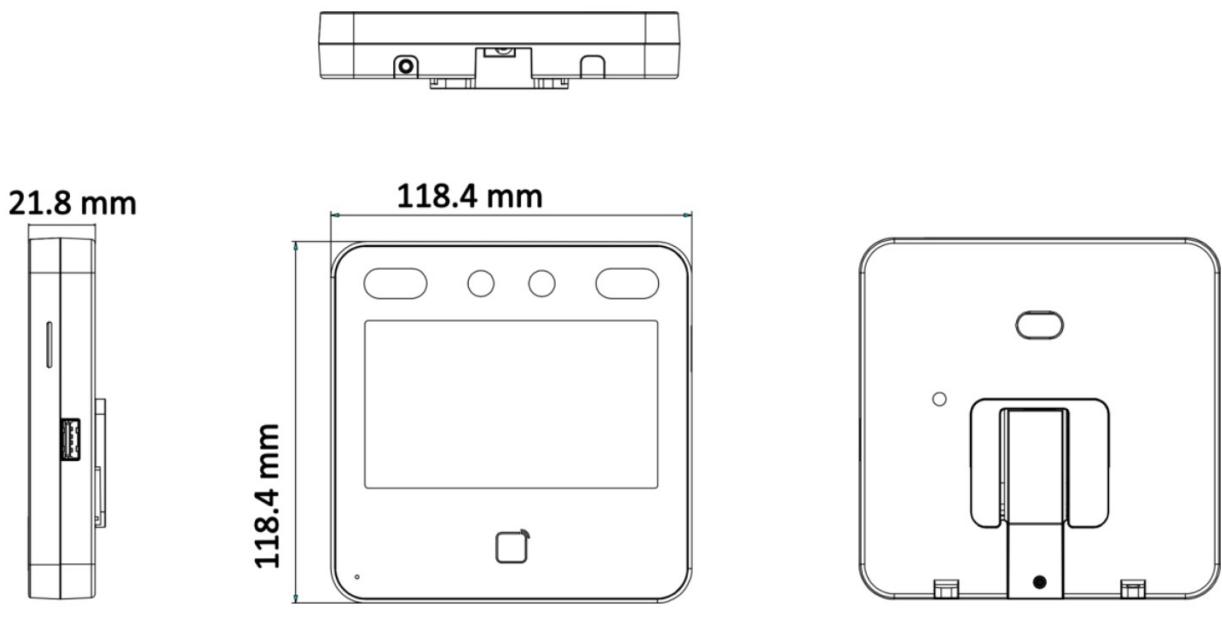

Unit: mm [inch]

► Related Products

Access Control System - Access Card

PACD-0004



RFID Card Mifare 13.56 MHz

2025/11/2