



SFP3213-10

New Product Setup for Distribution & Messaging Guide

EnGenius's SFP3213-10 SFP plus transceivers are hot-swappable multi-purpose optical modules that support 10 Gigabit Ethernet applications across most switching and routing platforms. The transceivers support operation at 10Gbps serial optical data transfer rates on a single duplex fiber core with a length of up to 10,000m, ideally suited for data centers, enterprise facilities, and storage area networks.

Features & Benefits

- High Quality 10Gbase SFP plus transceiver
- IEEE 802.3az compliant
- Hot-swappable LC Duplex connector
- Low power dissipation
- Class 1 laser product, complies with International Safety Standard IEC 825
- ROHS compliant



Technical Specifications

Standard Compliance

IEEE 802.3ae 10Gbase-LR

Data Rate Gigabit

10.3125G

Media Type

SMF

Connector

Duplex LC Connector

Single / Bi-Directional

Single Direction

Average Optical Transmission Power

-8.2 ~ -0.5 dBm

Receiver Sensitivity

12.6 dBm

Wavelength

1310nm DFB

Cable Type

Single-mode

Supply Voltage

3.13V ~3.46V

Max Voltage/Current

3.46V/300mA

Temperature

0°C ~70°C

Humidity

5~95% (non-condensing)



Dimensions (Lx W x H)

58.4mm x 13.9mm x 12.6mm

Certification

Compliant with Class 1 Laser International Safety Standard with EN 60825-1

SFP3213-10

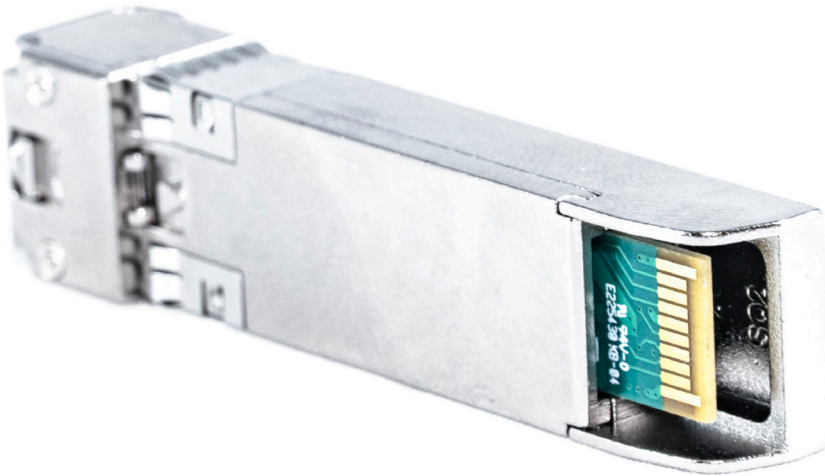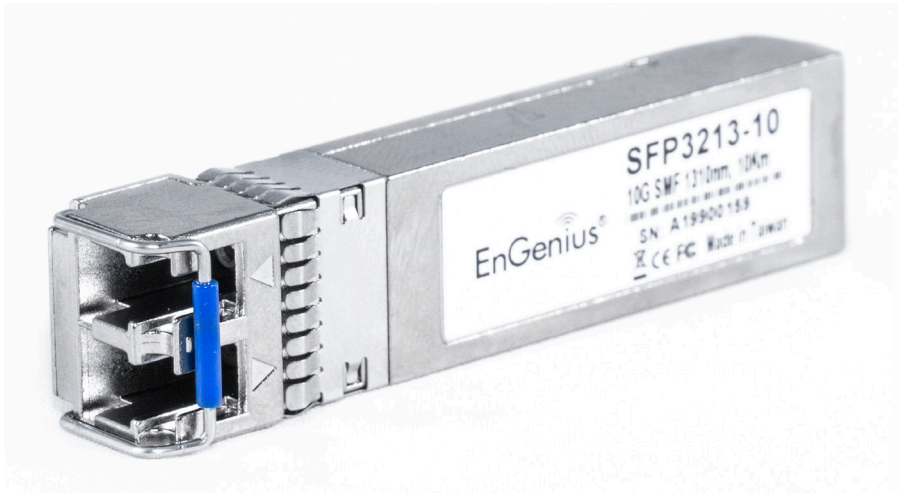

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.

EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: partners@engeniustech.com | Website: engeniustech.com

Version 1.00 4/21/2020

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2020 EnGenius Technologies, Inc. All rights reserved.