

Kisi Controller Pro 2^{KD-CP2}

Wiegand board^{KD-WB1}

Bring enterprise-grade security to your business by deploying Kisi's cloud-based access control over your existing wiring and readers.


With the Kisi Controller Pro 2 you can easily migrate to the Kisi platform and modernize your access control system while keeping your existing wiring, readers, and even credentials.

New features

- Enhance your security with extra features, like intrusion detection or motion sensor, using the 12 generic inputs on the Kisi Controller Pro 2.
- Detect tampering with the new Tamper input
- The RS-485 interface input allows you to connect cameras or wireless contact sensors to your Controller.

What's in it for you?

- Secure as many doors as you want in a cost-effective way
- No disruption of operations, transparent for the users
- Reuse as much of your existing hardware as you want

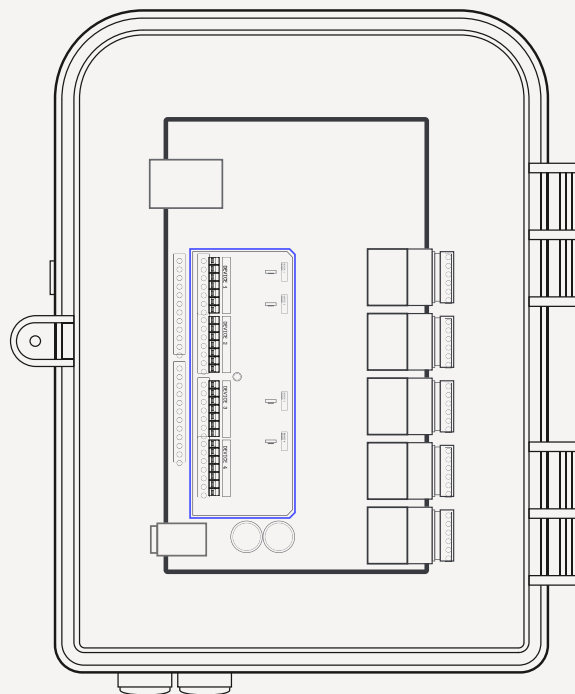

Height 12" (30.48 cm) Width 9" (22.86 cm) Depth 3" (7.62 cm)

Features

Power
24V DC (included)

Wiegand board adaptor connection
4x6 Wiegand in/output (12 volts direct current, GND, D0, D1, LED1, LED2, BZR)

Four dry or wet relays
Wiring to door security hardware: dry, 12/24 volts direct current; wet: max 0.25 ampere x 24 volts or 0.5 ampere x 12 volts per relay

One dry or wet relay
Wiring to intrusion detection hardware (siren/third party alarm systems): dry, 12/24 volts direct current; wet, max 0.25 ampere x 24 volts or 0.5 ampere x 12 volts per relay

12 generic inputs
Configurable as either contact sensor or request to exit

One Tamper input
To send a message whenever the Controller is tampered with

One RS-485 interface input
To support third-party devices, e.g. wireless locks or cameras

Updates
Secure over-the-air (OTA) updates

Connectivity
Via Ethernet

Learn more

[Controller Pro 2 | Wiring](#)

getkisi.com

[Wiegand board | Wiring & Connection](#)



45 Main Street,
11201 Brooklyn
USA

sales@getkisi.com
getkisi.com