



**INNOVATIVE**  
HIGH DEFINITION SURVEILLANCE



**OMNI**  
**EZ** HD TVI

---

 **KEZ-c2BR4IR**

---

1080p HD Over Regular Coax or UTP  
Outdoor IR Bullet True Day/Night Camera  
66' IR Range, IP67, 12VDC

KEZ-c2BR4IR: 3.6mm, Black Housing




**OMNI  
EZHD TVI**

**KEZ-C2BR4IR**

1080p HD Over Regular Coax or UTP  
Outdoor IR Bullet True Day/Night Camera  
66' IR Range, IP67, 12VDC

Features

- 1/2.7" Progressive Scan CMOS
- EZHD-TVI: 1080p 30 FPS
- True Day/Night
- 20 IR LEDs with 66' Smart IR Range
- Min. Illumination of 0 Lux (IR LED On)
- IP67 (Weatherproof)
- Fixed Board Lens
- DC 12V Power

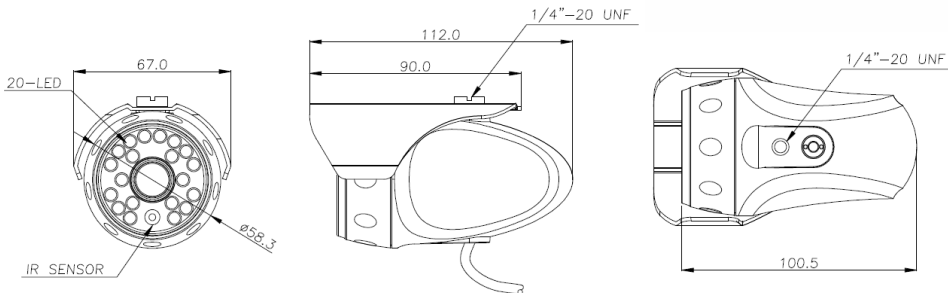

**1080p** **True Day/Night** **66' Smart IR Range** **IP67 Weather Resistant** **DC12** **BLC HLC**

Technical Specifications:

<b>Image Device</b>	1/2.7" PROGRESSIVE SCAN CMOS
<b>Effective Pixels</b>	1920 (H) x 1080 (V)
<b>Unit cell size</b>	3.0um (H) x 3.0um (V)
<b>Video output mode</b>	HD-TVI : 1080P 30fps(25fps)
<b>Transmission Distance</b>	HD-TVI : Color 300m@RG59 , BW 500m@RG59
<b>Minimum Illumination</b>	0 Lux (LED On)
<b>Shutter speed</b>	Auto, 1/25, 1/30, 1/50, 1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/3000, 1/10000
<b>BLC/HLC</b>	BLC/HLC
<b>AGC</b>	1~5 (Max. 30dB)
<b>2DNR</b>	AUTO
<b>White Balance</b>	AUTO / USER / PUSH / Manual
<b>Lens</b>	Board Lens
<b>Day&amp;Night</b>	True Day&Night
<b>IR-LED</b>	850nm, up to 66 Foot IR Distance <sup>†</sup>
<b>IP Rating</b>	IP67
<b>Temperature/ Humidity</b>	Operation : 14°F~122°F(-10°C~50°C) Storage : -4°F~140°F(-20°C~60°C)
<b>Power Consumption</b>	DC 12V ±10% Max.350mA
<b>External Control</b>	UTC
<b>Dimension</b>	Ø 2.29 x 3.93 Inches (Ø 58.3 x 100mm)
<b>Weight</b>	Approx. 12.69 Oz



<sup>†</sup>As with all IR cameras, IR range will vary based on scene IR reflectivity and illumination. KT&C America reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.